



PREMIUM

MID-RANGE

ECONOMY

### PREMIUM CONSTRUCTION SOLID EXCAVATOR

Trelleborg Excavator solid tires deliver superb performance in harsh environments.

Puncture proof construction and specialist compounds ensure maximum productivity for critical equipment in specialist applications. Trelleborg Excavator tires can be used in single or twin configurations offering enhanced stability and load bearing capabilities. Excavator is also available in a wider version, the XL.


Principally designed for use in waste & recycling Trelleborg Excavator solid tires are also ideal for use in environments where the risk of tire damage can be high such as infrastructure development and timber.



Excavator

Excavator XL

### COMPLETE ASSEMBLIES

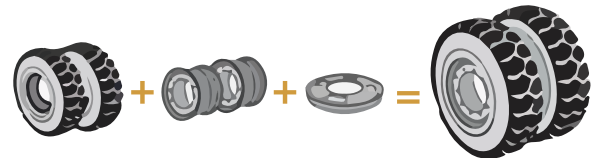

### EXCAVATOR

Tire Size	Rim Size	Overall Diameter [mm]	Section Width [mm]	Static Load (kg)	Load Capacity 10 km/h [kg]
10.00-20	7.0/7.5/8.0-20	1005	240	7550	5450
12.00-20	8.0/8.5-20	1092	256	9515	6865

N.B.: Can also be purchased as dual assembly

### EXCAVATOR XL

Tire Size	Rim Size	Overall Diameter [mm]	Section Width [mm]	Static Load (kg)	Load Capacity 10 km/h [kg]
8.25-20	6.5-20	950	228	5510	3980
9.00-20	6.5/7.0-20	994	208	6795	4905
10.00-20	7.0/7.5/8.0-20	1023	253	7550	5450
12.00-20	8.0/8.5-20	1093	278	9515	6865

N.B.: Excavator and Excavator XL are not for use on forklift trucks.